


Filter AF series

Symbol:



AF3000-03D AF2000-02 AF3000-03A AF5000-10


How to order

AF	2000	-	02	D
Filter	Body size		Port size	Drain type
	1000		M5:M5	Nil:Manual drain
	2000		02:1/4	A:Semi automatic drain
	3000		03:3/8	D:Automatic drain
	4000		04:1/2	
	5000		06:3/4	
			10:1	

Specification

Model	AF1000-M5 AF1000-M5A AF1000-M5D	AF2000-02 AF2000-02A AF2000-02D	AF2000-02 AF3000-02A AF3000-02D	AF2000-03 AF3000-03A AF3000-03D	AF4000-03 AF4000-03A AF4000-03D	AF4000-04 AF4000-04A AF4000-04D	AF4000-06 AF4000-06A AF4000-06D	AF5000-06 AF5000-06A AF5000-06D	AF5000-10 AF5000-10A AF5000-10D	
Port size RC (PT)	M5×0.8	1/4 "	1/4 "	3/8 "	3/8 "	1/2 "	3/4 "	3/4 "	1 "	
Capacity of bowl (cm ³)	4	15	20	20	45	45	45	130	130	
Flow rate (L/Min)	110	750	1500	1500	4000	4000	6000	7000	7000	
Fluid	Air									
Proof pressure	1.5Mpa(15.3kgf/cm ²)									
Max.operating pressure	1.0Mpa(10.2kgf/cm ²)									
Ambient & fluid temperature	5-60°C									
Nominal filtration rate	5 μ M									
Bracket(1pcs)		B240A	B320	B340A	B440A	B440A	B540A	B640A	B640A	
Weight (kg)	0.07	0.19	0.56	0.29	0.55	0.55	0.58	1.08	1.08	
Main parts material	Body	Aluminum alloy								
	Bowl	PC								
	Bowl guard	AW1000~AW2000:without AW3000~AW5000:with(iron)								

Dimension

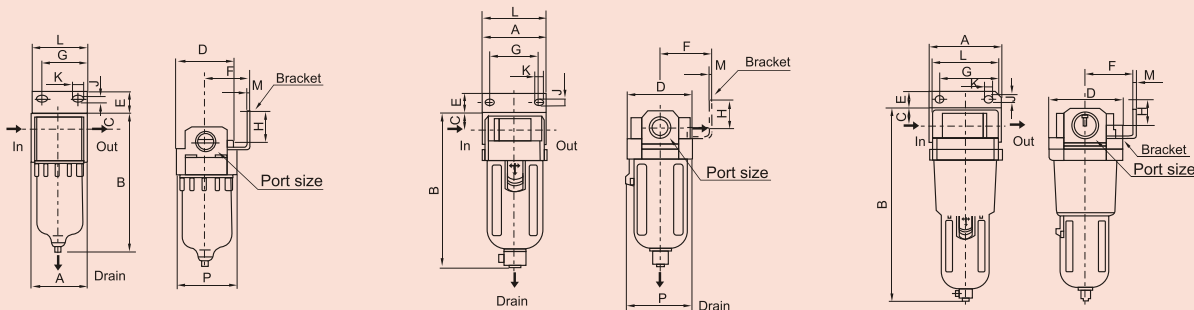

Model	Port size	A	B	C	D	E	F	G	H	J	K	L	M	P
AF1000	M5×0.8	25	66	7	25	-	-	-	-	-	-	-	-	26.5
AF2000	1/4 "	40	97.5	11	40	17	30	27	22	5.4	8.4	40	2.3	40
AF3000	1/4 ", 3/8 "	53	132.5	14	53	16	41	40	23	6.5	8	53	2.3	56
AF4000	3/8 ", 1/2 "	70	168.5	18	70	17	50	54	26	8.5	10.5	70	2.3	73
AF4000-06	3/4 "	85	172.5	20	70	14	50	54	25	8.5	10.5	70	2.3	73
AF5000	3/4 ", 1 "	90	247.5	24	90	23	70	66	35	11	13	90	2.3	90