

ECOLINE™ Single Bag Filter Housing



Lightweight, economical single bag filter housing for commercial applications

MINILINE EBF
single bag filter
housing (available
in EMEA)

Eaton's ECOLINE single bag filter housing is a light-weight design for commercial, OEM, non-hazardous, low-pressure applications that do not require a code stamp.

This single bag filter housing is a highly cost-effective solution for price-sensitive applications and features a handy V-clamp closure and threaded couplings. Units come standard with filter bag size 01 or 02 stainless steel restrainer baskets. Sizes 03 and 04 available in EMEA.

Features

- Side inlet with evacuation cover prevents spillage of unfiltered liquid, allowing for clean and easy filter bag change-outs
- V-clamp cover closure is easy to operate, allowing cover to be removed or closed quickly
- Compression hold down creates 360 degree sealing between the filter bag and the bag filter housing
- Designed with a 1/4" thread port on the lid for vent or gauge
- Smooth, bead-blasted finish makes it easy to completely clean the interior

Options

- Available in 316 stainless steel for high corrosion resistance. 304 stainless steel version available in EMEA
- Adjustable mounting legs for simplified installation
- Multiple I/O connections to suit application

EATON

Powering Business Worldwide



Unique, internal body-to-basket O-ring seal prevents bypass and is easy to maintain


ECOLINE Single Bag Filter Housing

Applications

Coarse filtration > 500 µm ✓
 Medium filtration > 10 µm
 Fine filtration < 10 µm

Pre-filtration ✓
 Safety filtration
 High volume
 Batch filtration
 Circuit filtration
 Continuous filtration

Solvents, paints
 Fats and oils
 Catalyst, activated carbon
 Acids, bases
 Petrochemicals
 Water, waste water ✓
 Chemical industry
 Pharmaceuticals
 Metal cleaning ✓
 Automotive
 Electronics
 Food and beverage
 Paint and lacquer
 Water treatment ✓
 Galvanic industry

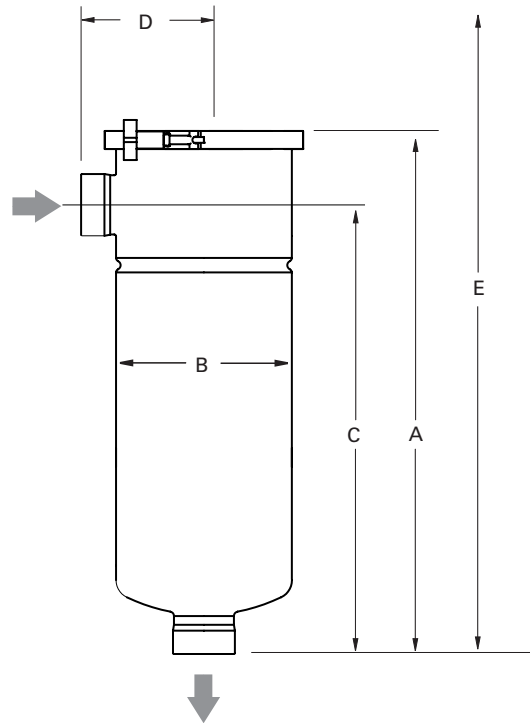

Dimensions - inch (mm)

Models	A	B	C	D	E
EBF-0101	22.88 (581)	7.68 (195)	19.64 (489)	5.37 (150)	37.00 (940)
EBF-0102	38.50 (977)	7.68 (195)	35.19 (884)	5.37 (150)	68.00 (1,727)
EBF-0103	14.56 (370)	4.50 (114)	11.81 (295)	3.50 (110)	24.00 (609)
EBF-0104	20.69 (525)	4.50 (114)	17.87 (454)	3.50 (110)	34.50 (876)

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request.
 Metric measures represent comparable products produced for EMEA and may not be an exact conversion from inches.

Technical data

Models	No. of filter bags	Size	Flow rate ¹ GPM (m ³ /h)	Max. pressure psi (bar)	Max. temp. °F (°C)	Housing volume gal (l)	Housing weight lb (kg)	I/O connections
EBF-0101	1	1	88 (20)	100 (6)	250 (120)	4.1 (15.5)	25 (7.5)	2" thread
EBF-0102	1	2	176 (40)	100 (6)	250 (120)	7.1 (27.0)	38 (11.0)	2" thread
EBF-0103	1	3	26 (6)	150 (9)	250 (120)	0.8 (3.0)	9 (3.5)	1 1/2" thread
EBF-0104	1	4	53 (12)	150 (9)	250 (120)	1.2 (4.5)	11 (4.5)	1 1/2" thread

¹ Maximum theoretical flow based on water viscosity, filter bag specific. ² Depending on seal material.
 Metric measures represent comparable products produced for EMEA and may not be an exact conversion from inches.

US
 EF-FBH-14
 10-2014

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.