


VRtype
U-turn HEXAGONAL VALVE



VCtype
VALVE CHANGE TYPE
DUPLEX OIL STRAINER

STWtype DUPLEX OIL STRAINER




SPEC.

Nominal dia.	15A~40A
Fluid	Various oil
Working press.	0.4MPa
Max.fluid temp.	80°C
Connection	Screwed type
Body Material	FC200

Product Description

The screwed type duplex strainer is design for 40A and under, and is compact with inlets and outlets at the same height allowing for easier piping, and also has a large surface area ratio element, allowing it to be used for highly viscous oil and other substances.

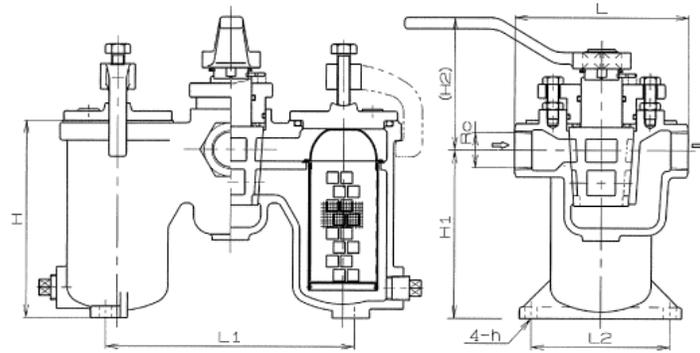

TYPE	BODY				LEG			
	Rc(in)	H	H1	(H2)	L	L1	L2	h
STW 15	1/2	115	92	(120)	120	125	90	12
STW 25	1	170	145	(120)	150	215	120	12
STW 32	1 1/4	225	195	(150)	175	250	120	15
STW 40	1 1/2	250	220	(150)	210	265	130	15

STUtype SIMPLEX OIL STRAINER

SPEC.

Nominal dia.	15A~40A
Fluid	Various oil
Working press.	0.4MPa
Max.fluid temp.	80°C
Connection	Screwed type
Body Material	FC200