
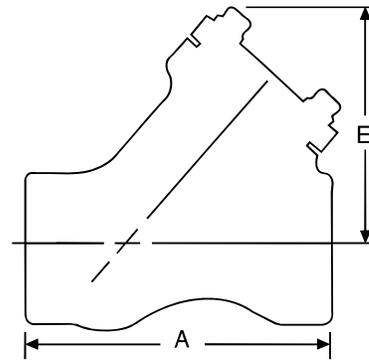


Ball Check Valves Class 800 2000 PSI @ 100°F (137.9 BAR @ 38°C)



832

Standard Features

- Bodies and covers are of forged steel (A105 or F11).
- Bolted cover.
- Y-Pattern.
- Integral Stellite seat.
- Asbestos free spiral wound cover gasket.
- Stainless steel spring.
- Stainless steel ball.

Pressure Class 800 (PN 130)

FIG. NO.	TYPE	ENDS	NPS (DN)
832	Y-Pattern	Threaded	1/4 (8) thru 2 (50)
832Y	Y-Pattern	Socket Welding	

Dimensions - Globe

Bold face numerals are in inches and pounds.

Green numerals are in millimeters and kilograms.

Figure No. 832/832Y	NPS DN	1/4 8	3/8 10	1/2 15	3/4 20	1 25	1-1/4 32	1-1/2 40	2 50
A - End to End		3 76	3 76	3 76	3.6 91	4.3 109	5.8 147	5.8 147	6.5 165
E - Center to Top		2.8 71	2.8 71	2.8 71	3.3 84	3.8 97	4.6 117	4.6 117	5.1 130
Weight		2 .9	2 .9	2 .9	3.5 1.6	5 2.3	11 5	10 4.5	14 6.4